


ABUS GM4 - 1000kg - 2-strängig (1125-718006)

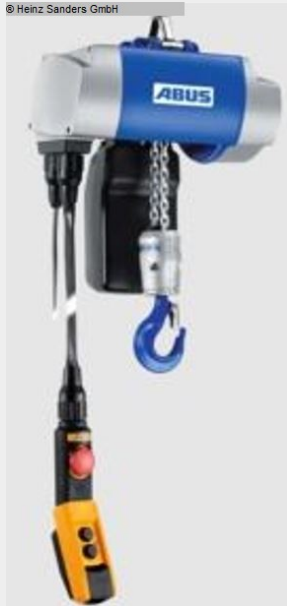

Control type
konventionell

Construction year
NEU

Machine no.
1125-718006

Make
ABUS

Location
49779 Niederlangen

Use as a stationary chain hoist
Chain hoist type GM 4 1000.5-2, 2 strands
painted in color RAL 5017 traffic blue
Load capacity 1 ton
Hook path 4000 mm
Place of operation indoor operation
Calculation basis FEM 9.901
Engine group 2m / M5
Operating voltage 3~50Hz 400V
Direct control type of control
Degree of protection IP55
Lifting, 2-stage (pole-changing) 1.3 / 5 m/min
Lifting power 0.22 / 0.9 kW
Duty cycle 60% ED
Circuits 360 c/h

Standard equipment trolley electrics

Solo trolley/hoist, ready-to-use, with power connector.

Operation from the hallway using a pendant control
The pendant control with 2-stage pushbuttons is attached to the chain hoist.
Make: ABUS
Length of control cable including pendant control: 3310 mm
Control line calculation according to hook path

overload protection
Mechanical slip clutch as overload protection. The slip clutch is preset.

Machine attributes

weight max.: 1,0 t
stroke: 4000 mm

Machine images