


ZMM CU400/1500 (1125-2200002)

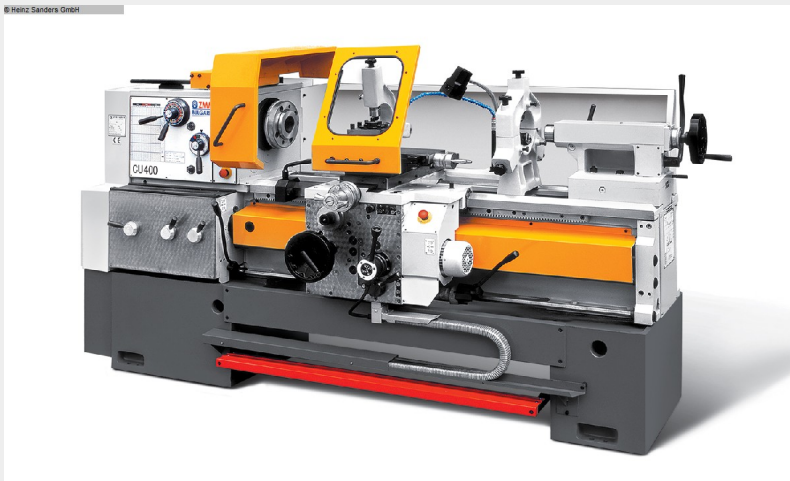

Control type
konventionell

Construction year
NEU

Machine no.
1125-2200002

Make
ZMM

Location
49779 Niederlangen

- Coolant device
- Machine light
- Chip back wall
- Spindle protection
- Lathe chuck protection
- Tool holder protection
- Interchangeable gears

*Special equipment

- 3-jaw chuck Ø 250 mm type 3204/ DIN6350, BISON
- MULTIFIX quick-change holder type B, including 4 tool holders
- 3-axis digital display DRO Newall
- Foot pedal with brake function CE

Machine attributes

| | |
|----------------------------------|-----------------------|
| turning diameter: | 440 mm |
| turning length: | 1500 mm |
| swing diameter over bed slide: | 210 mm |
| Swingdiameter in the bed bridge: | 620 mm |
| centre height: | 210 mm |
| reus: | 21 (20 - 2000) U/min |
| tail stock: | MK5 |
| quill stroke: | 180 mm |
| diameter of quill: | 70 mm |
| spindle taper: | DIN 55027 Nr. 8 |
| spindle bore: | 62 mm |
| feed: | längs 0,04 - 12 m/min |
| feed: | quer 0,02 - 6 m/min |
| total power requirement: | 7,5 kW |
| weight of the machine ca.: | 2430 kg |
| dimensions of the machine ca.: | 2850 x 980 x 1330 mm |

Machine images

